


459

ZIRCONIA CERAMIC LINED

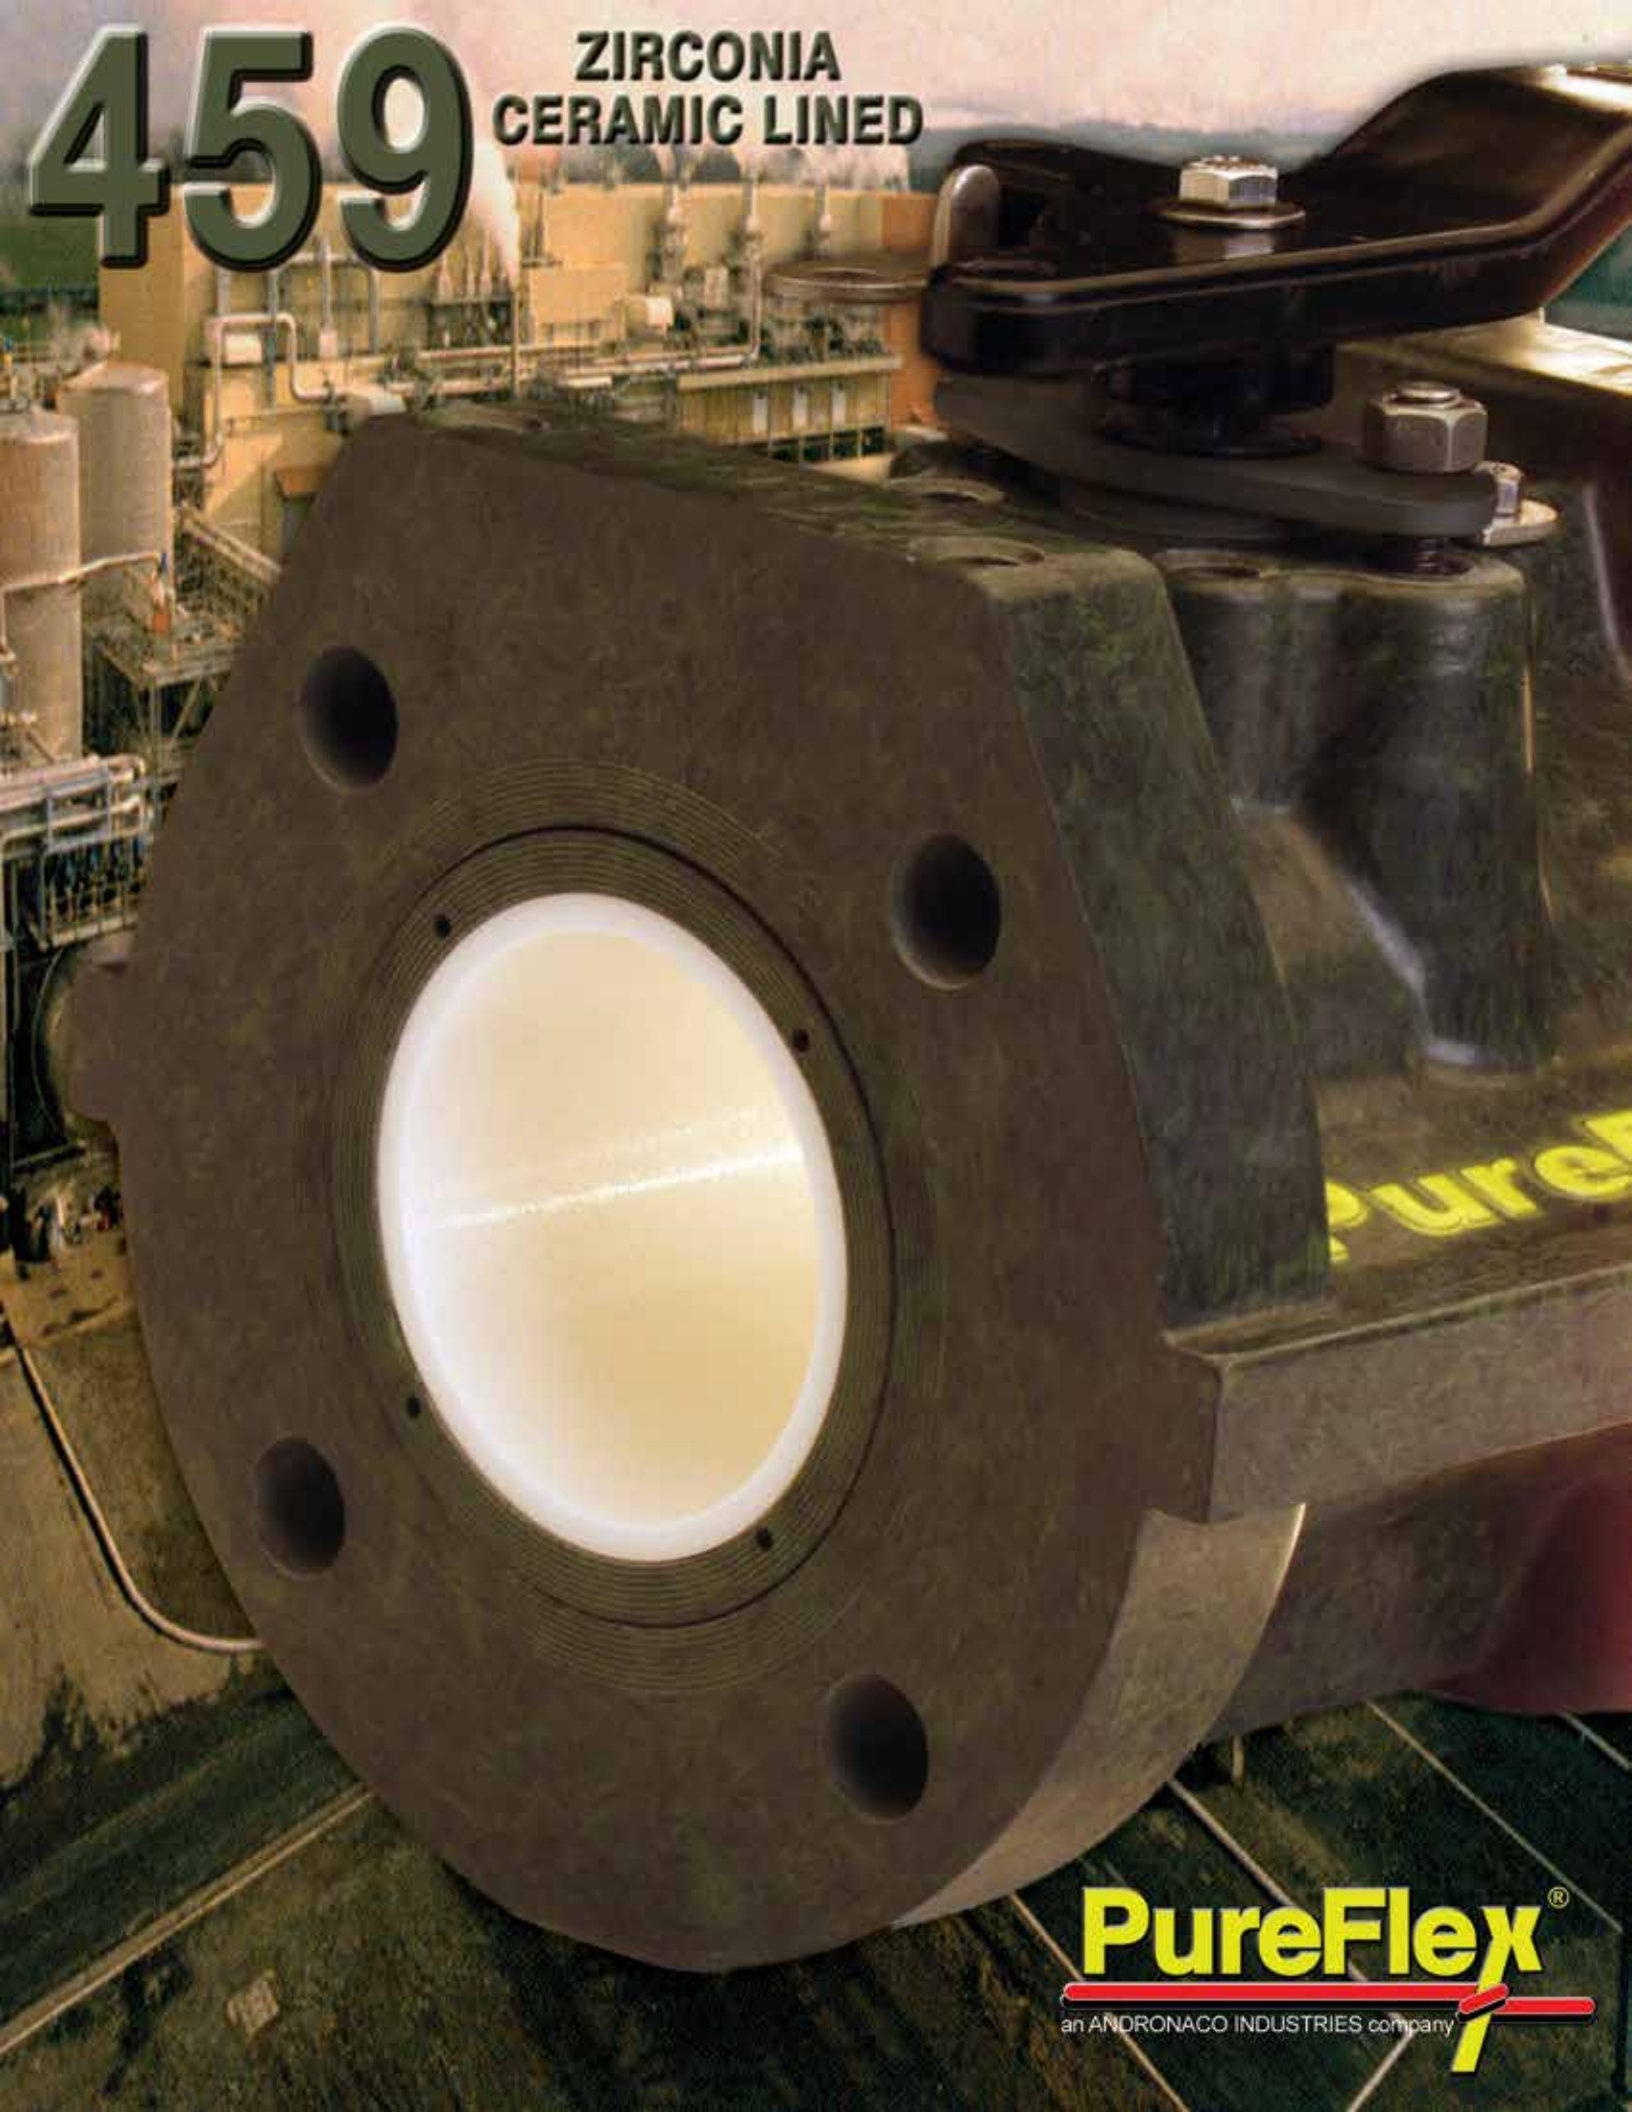

PureFlex[®]
an ANDRONACO INDUSTRIES company


The future of erosion control is about to change

459 Ceramic Lined


Tough Valve For Tough Services

PureFlex 459 series ceramic lined composite ball valve is a superior quality, ANSI Class 150 valve engineered with features not yet available in any other ceramic valve. The valve body is manufactured from strong, light weight advanced premium E-Plus™ epoxy resin reinforced with carbon graphite. The ceramic liner / seats and ball are Yttria-partially stabilized zirconia (Y-PSZ) which provides unmatched impact resistance. The valve is able to withstand abrasion, cavitation, wear, thermal cycling and severe corrosive media and environments up to 275°F. The 459 series ball valve exceeds Class IV shut-off and its stem seal will meet your routine or most rigid service requirements. The massive one piece body meets ANSI B16.10 dimensions and its ISO 5211 universal mounting pad and flange mounting makes automation simple even with the valve in service. The 459 series valves are 1/2 the weight of competitors ceramic valves, offer maximum corrosion resistance, the elimination of product intrapment and provide the ultimate in flexibility and value.


Flow Control Options

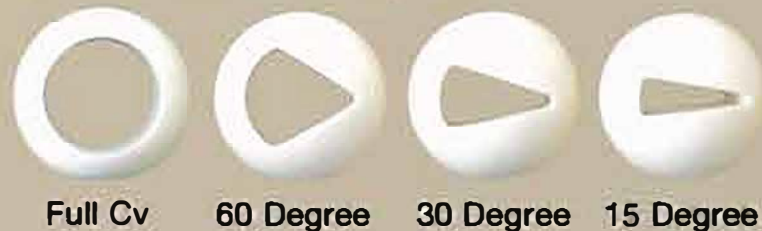


Knoop Hardness Comparison

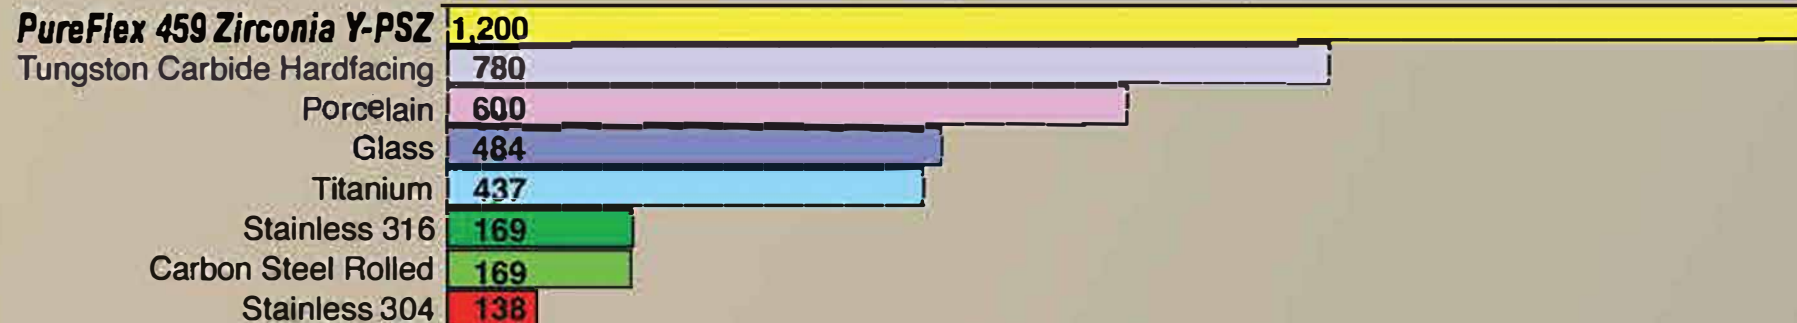

LIMITED
2
YEAR
WARRANTY

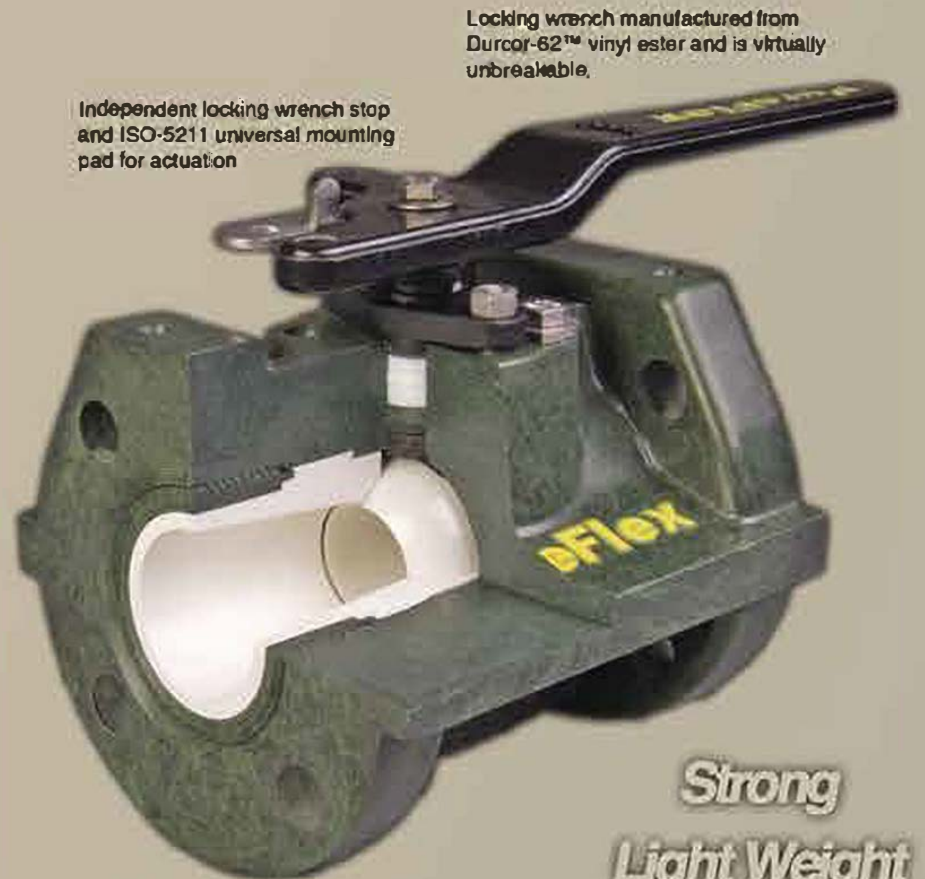

Strong
Light Weight
Zero Corrosion

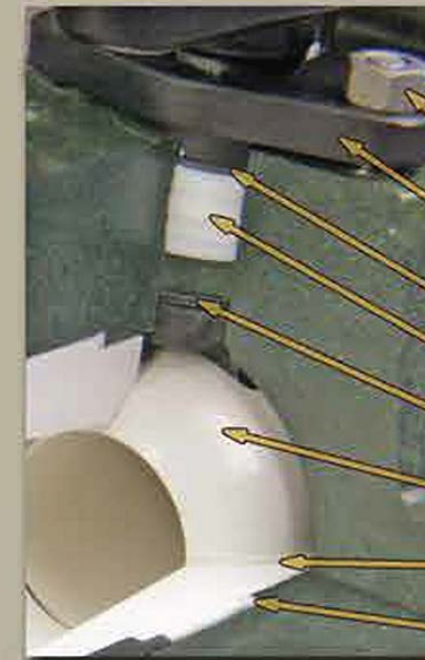


Features

- Hastelloy C276 Hardware
- Durcor-62™ Live-Load™ (patent pending) packing gland
- Stem Bearing - Graphite / PTFE
- Stem Sealing - PTFE Chevron type
- Thrust Bearing - Graphite / PTFE
- Ball - Yttria-Stabilized (Y-PSZ) Zirconia
- Seats / Liner - Full cavity filled Yttria-Stabilized (Y-PSZ) Zirconia
- End Cap Seal - PTFE coated Viton

Industries Served

Coal-Fired Power
Pulp & Paper
Steel
Mining
Chemical Processing
Pollution Abatement

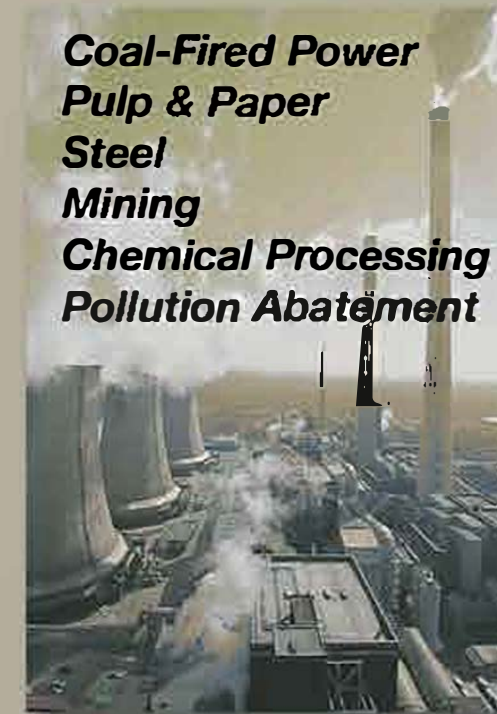


Applications

Desulfurization
Corrosive Pulps
Iron Ore Tailings
Titanium Dioxide Slurry
Fly Ash
Lime Slurry
Calcium Chloride Brine
Scrubber Liquor
Fume Scrubber
Sand Slurry
Pump Cavitation
Valve Throttling

Technical Data

Pressure / Temperature Curve

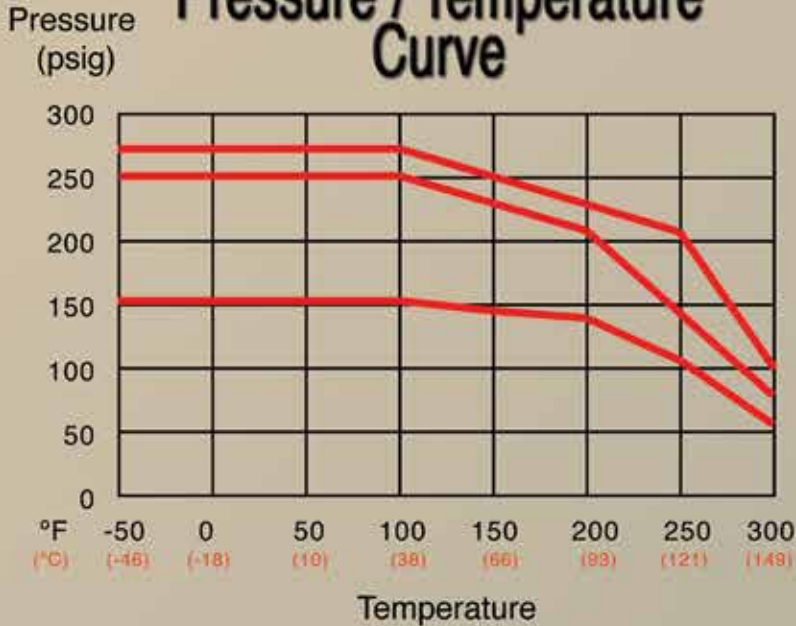

Cv Data

VALVE SIZE	FULL OPEN Cv
1"	45
1 1/2"	120
2"	165
3"	350
4"	550
6"	1245

Actuator Sizing

VALVE SIZE	TORQUES @ MAX. DIFF. PSI
1"	70 in. - lbs
1 1/2"	160 in. - lbs
2"	180 in. - lbs
3"	440 in. - lbs
4"	920 in. - lbs
6"	1745 in. - lbs

Valve Data

SIZE RANGE: 1" TO 6"

CERAMIC: YTTRIA-STABILIZED ZIRCONIA

PRESSURE RANGE: FULL VACUUM TO 275psi

MAXIMUM SHOCK: INSTANTANEOUS THERMAL = 200°F

TEMPERATURE RATINGS: (-)50°F TO 275°F


(PROCESS FLUID MAY EFFECT TEMPERATURE LIMIT, PLEASE CONSULT PUREFLEX CHEMICAL GUIDE)

FLOW: BI-DIRECTIONAL

CONFORMANCE: CONFORMS TO ALL APPLICABLE STANDARDS OF ANSI / ASME B16.10, API-598, MSS-SP72 AND ISO-5211

FLANGE ADAPTABILITY: ANSI B16.5 CLASS 150 (STD) DIN, JIS AND BS AVAILABILITY

SHUT OFF: EXCEEDS ANSI/FCI 70-2 CLASS IV

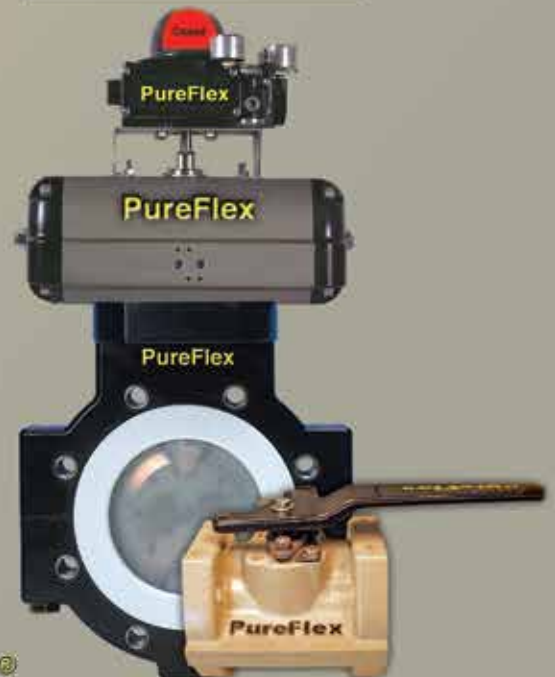

PUREFLEX, INC. INFORMATION IS BASED ON TECHNICAL DATA AND TESTING THAT PUREFLEX BELIEVES TO BE RELIABLE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION IS INTENDED FOR USE BY PERSONS HAVING TECHNICAL SKILL, AT THEIR OWN DISCRETION AND RISK. SINCE CONDITIONS OF OF PRODUCT ARE OUTSIDE OF PUREFLEX, INC CONTROL, PUREFLEX, INC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND ASSUMES NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION. Z-CORE® IS A REGISTERED TRADEMARK OF SMITHFIBERCAST. HASTELLOY IS A REGISTERED TRADEMARK OF HAYNES INTL.

PureFlex®
an ANDRONACO INDUSTRIES company

4855 Broadmoor Ave.
Kentwood, MI. 49512 USA
616.554-1100 Fax 616.554-3633

459-0312